


PRODUCT DATA SHEET



LİNEER LED RK-2000 SERIES

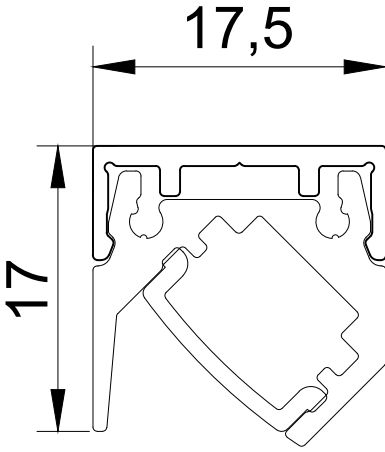

LUMINARE DETAILS

HOUSING
PMMA cover
Aluminium eloxal body

VOLTAGE
24 VDC

COLOR TEMPERATURE

2700 K
3000 K
4000 K
5000 K

COVER TYPE

Clear CO
Opal MO

MOUNTING

Surface mounted

APPLICATIONS

Indoors

CONTROL SYSTEM

1-10V
DALI
ON/OFF

OPTIONAL ACCESSORIES

Power supply
Emergency Kit



3000K



4000K



5000K



IP40



III

RoHS



F

CE

RK 2000 SERIES					
ORDER CODE	LED/MT	LED	LUMEN/MT	POWER CONSUMPTION	IP RATE
RK-2100.01	24 LED/MT	5630	800 LM/MT	10 W/MT	IP 40
RK-2100.02	36 LED/MT	5630	1200 LM/MT	14 W/MT	IP 40
RK-2100.03	48 LED/MT	5630	1600 LM/MT	18 W/MT	IP 40
RK-2100.04	60 LED/MT	5630	2000 LM/MT	24 W/MT	IP 40
RK-2200.01	60 LED/MT	3014	440 LM/MT	6 W/MT	IP 40
RK-2200.02	72 LED/MT	3014	520 LM/MT	8 W/MT	IP 40
RK-2200.03	120 LED/MT	3014	840 LM/MT	12 W/MT	IP 40
RK-2200.04	160 LED/MT	3014	1200 LM/MT	16 W/MT	IP 40